




SlowStop® Rebounding Bollard – Type 3 (SS-T3Y-100)

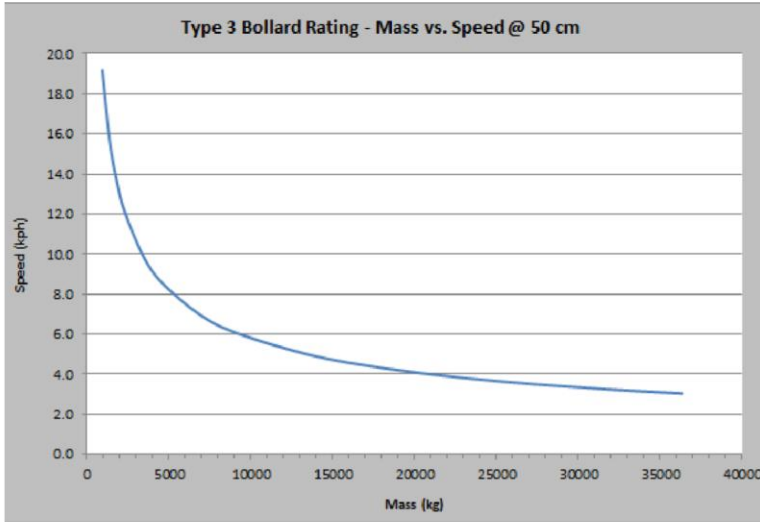

Color: RAL 1023 Yellow Bollard on Black Base

Diameter: 177,8 mm (8 mm wall)

Height: 100 cm

Set Screws: 8 M16 x 2.00
8mm Hex

Cap: Black Plastic



Installs with eight (8)
Concrete Anchor Screws
(not included)

SPECIFICATIONS


- Energy Absorption: 12,934 joules
- Temperature Rating: -40°
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat

RECOMMENDED USES

- Loading Docks and Warehouse Entrance Ramps
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Post-tensioned Concrete
- Not for Hostile Vehicle Security



410

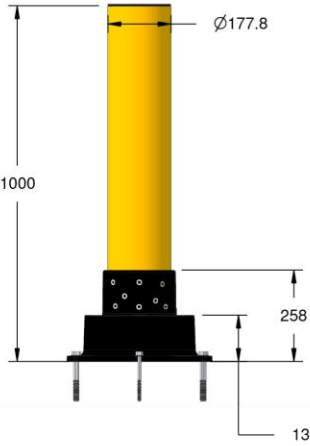

Ø177.8



1000

258

131



8 X M16-2MM
CUPPED SET SCREWS

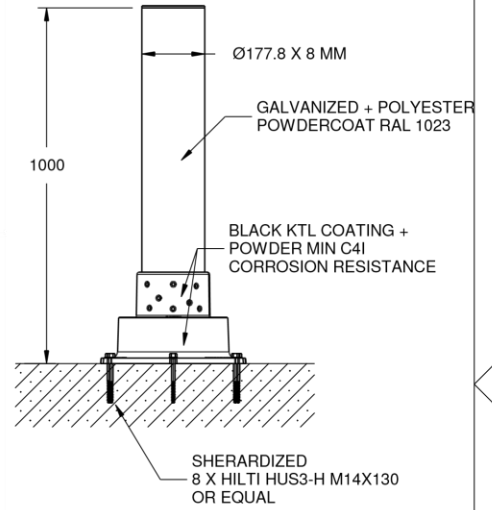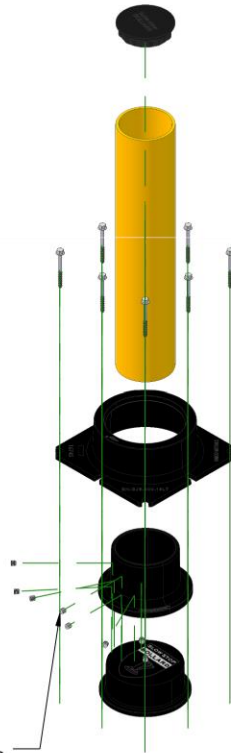

* MINIMUM FOUNDATION DEPENDS ON LOCAL
SOIL CONDITIONS, WEATHER, & ENG REQTS



IMPACTrecovery
SYSTEMS
"Performance for a Safer Tomorrow"

CONFIDENTIAL & PROPRIETARY

The drawing on this print and the information therewith are property of Impact Recovery Systems, Inc., and shall not be used or discussed in whole or in part without the consent of Impact Recovery Systems, Inc.

4955 STOUT DR. · SAN ANTONIO, TX 78219 · (800) 736-5256

SIZE
A

PART NO.
SS-T3Y-100

DWG.
SLOWSTOP BOLLARD - TYPE 3 X 100CM

REV
1.0

SCALE

IMPACT RECOVERY SYSTEMS, INC.

DATE 29-MAR-2016